



**HW40**

| Dimensions (mm) | External | Internal |
|-----------------|----------|----------|
| Height          | 1850     |          |
| Width           | 595      |          |
| Depth           | 640      |          |
| Capacity (ltr)  |          |          |
| Gross           |          | 305      |
| Net             |          | 269      |



**HS40**

| Dimensions (mm) | External | Internal |
|-----------------|----------|----------|
| Height          | 1850     |          |
| Width           | 595      |          |
| Depth           | 640      |          |
| Capacity (ltr)  |          |          |
| Gross           |          | 305      |
| Net             |          | 269      |



**LW40**

| Dimensions (mm) | External | Internal |
|-----------------|----------|----------|
| Height          | 1850     |          |
| Width           | 595      |          |
| Depth           | 640      |          |
| Capacity (ltr)  |          |          |
| Gross           |          | 326      |
| Net             |          | 234      |



**LS40**


| Dimensions (mm) | External | Internal |
|-----------------|----------|----------|
| Height          | 1850     |          |
| Width           | 595      |          |
| Depth           | 640      |          |
| Capacity (ltr)  |          |          |
| Gross           |          | 326      |
| Net             |          | 234      |

## Features

- White laminated / stainless steel exterior
- White aluminium interior
- Reversible door
- Lock fitted as standard
- 4 adjustable shelves
- Replaceable door gasket
- Rollers to rear, adjustable feet to the front

## Additional Extras


- V2-SHELF40L - Large shelf for HW/HS40
- V2-SHELF40S - Small shelf for HW/HS40
- V2-GASKET40 - Door gasket for HW/HS/LW/LS40
- V2-CASTORKIT4 - Castor kit




## Technical Specification

|                               | HW40         | HS40         | LW40          | LS40          |
|-------------------------------|--------------|--------------|---------------|---------------|
| Temperature Range             | +2°C ~ +10°C | +2°C ~ +10°C | -10°C ~ -20°C | -10°C ~ -20°C |
| Climate Class                 | 4            | 4            | 4             | 4             |
| Power Supply                  | 13amp        | 13amp        | 13amp         | 13amp         |
| Cooling                       | Ventilated   | Ventilated   | Static        | Static        |
| Defrost                       | Automatic    | Automatic    | Manual        | Manual        |
| Refrigerant                   | R600a        | R600a        | R290          | R290          |
| Energy Efficiency Class       | B            | B            | B             | B             |
| Energy Consumption (kw/24hrs) | 0.89         | 0.89         | 2.18          | 2.18          |
| Power Usage (w)               | 127          | 127          | 210           | 210           |
| Weight (kg)                   | 78           | 78           | 79            | 79            |


### HW40

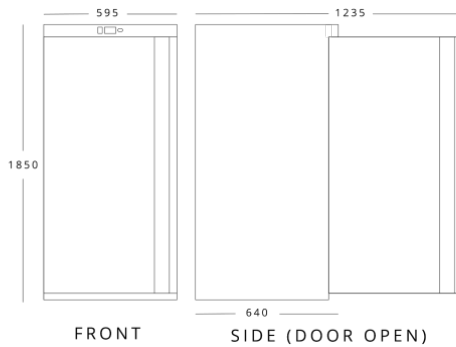

### HS40

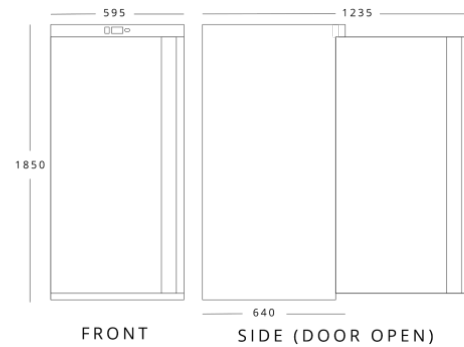

### LW40

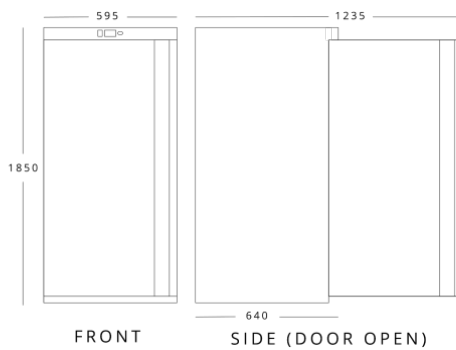

### LS40

